

This line of instruments is based on a proven robust and reliable design that is recognised world-wide as being the standard in recording.

Both models have differential inputs with constant impedance over all input ranges which allow for accurate measurements from almost any source.

The high sensitivity (up to 400 μ V full scale) and gilded input contacts allow even very low voltages to be measured accurately.

The high-speed servo system records signals up to 5 Hz and the 6th order 14 Hz low pass filter eliminates the 50/60 Hz noise completely.

An auto pen up at power off to prevents ink stains on paper. The newly designed penholder has improved grip and simplifies the exchange of pens.



Attenuator



Temperature Module

FEATURES

Modern design one or two channel recorder with state of the art technology

Differential inputs

User selectable left or right zero-position

Event marker per channel

Pen Offset Compensation with on/off switch¹⁾

Home function and grid function

Electrical pen lift

Remote control

¹⁾ optional

BD 11E Single channel flatbed recorder with electrical penlift and remote control.

BD 12E Dual channel flatbed recorder with electrical penlift per channel and remote control. Optional Pen Offset Compensation to overcome the separation between pens one and two.

In addition to the standard voltage inputs, the following input modules are also available for monitoring:

VOLTAGE INPUT ACCESSORIES

ORDER CODE

Attenuator 100x, 500V max.

0328-322

Attenuator 10x, 500V max.

0328-324

Current shunt 0-20 mA

0328-320

Current shunt 4-20 mA

0328-321

Current shunt 0-16 A

3300-001

Temperature module type J

0350-732

Temperature module type K

0350-731



The new electronic design not only fulfils the CE requirements but also the new CSA mark is applied for world-wide recognition of its safety.

COMPACT FLATBED RECORDER

GENERAL SPECIFICATIONS


recording system	potentiometric servo balance system
recording paper	roll chart
pens	disposable fibre tip cartridges
power supply	93.5 - 132 V / 187 - 264 V, 50/60 Hz (voltage selector) max. consumption 30 VA (1 channel), 40 VA (2 channels)
safety	Certified in accordance with UL Std. No. 3101-1 and IEC 1010-1
emission	EN 50081-1 (group standard) RFI: EN 55022
immision	EN 50082-1 (group standard) ESD: IEC 1000-4-2 EMF: IEC 1000-4-3 EFT: IEC 1000-4-4

ENVIRONMENTAL CONDITIONS

ambient temperature range	operating: -10 °C to +40 °C, storage: -40 °C to +75 °C
relative humidity	operating: 20 % - 85 % non condensing, storage 5 % - 95 %
housing material	Bay Blend no FR 110-00005; colour: white
flammability rating	according to UL 94 V-0
weight	3.5 kg including roll of chart
dimensions	380 x 290 x 90 mm (W x D x H)

SERVO SYSTEM

span settings	1-2-5-10-20-50-100-200-500 mV, 1-2-5-10-20 V
pen travel	200 mm
number of pens	1 or 2, factory installed
pen response time	< 0.2 s for 5 % - 95 % fsd (full scale deflection)
span accuracy	< 0.3 % fsd
non linearity	< 0.3 % fsd
dead zone	< 0.2 % fsd
input terminals	2 safety terminals
input impedance	1 M Ω for DC, 10 k Ω in series with 1.5 μ F for AC
input configuration	floating
maximum input voltage	42 VDC / 30 VAC (personal safety limits)
zero adjustment	-50 % to +150 % full scale
zero	selectable left-hand or right-hand side off the paper (default left)
zero drift	< 1 μ V/°C

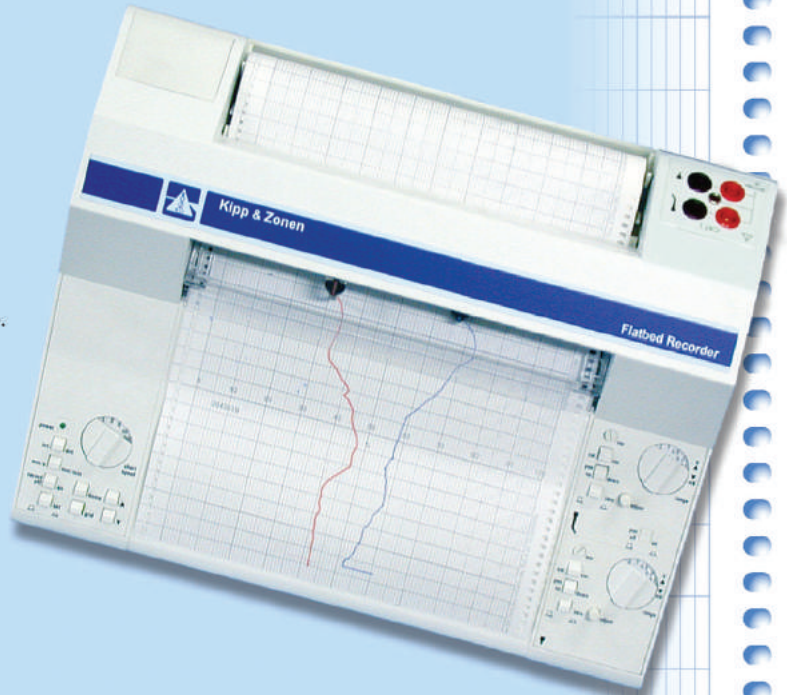

The motors used in the models are from the same brand and similar to the ones used in the Mars Pathfinder.

common mode rejection	130 dB (DC and 50 Hz AC)
variable range setting	40 % - 100 % of selected span
pen lift	electrical, pen 1 and 2 independent up/down

CHART DRIVE SYSTEM

speed setting	0.1-0.2-0.5-1-2-5-10-20 mm/min or mm/sec
step size	0.05 mm
inaccuracy time-base	better than +/- 50 ppm
recording paper	chart roll according to DIN 16230
paper length	25 metres
external input	TTL pulses or contact closure can control the chart speed

STANDARD INCLUDED

manual, power cord, fuses, chart roll,
one pen per channel

OPTIONS

POC module for channel 2
Safety banana plugs
Flight case

RECORDERS & DATA ACQUISITION

Kipp & Zonen B.V. reserve the right to alter specifications of the equipment described in this documentation without prior notice